

# SST™ GRAVITY CHUTES

*If you're currently using steel or fiberglass chutes as part of your conveying system, you know environmental factors can cause packages to stick. Our innovative design solves many of the material flow problems associated with conventional chutes.*

***THE LOW COEFFICIENT OF FRICTION OF UHMW-PE ALLOWS YOU TO MOVE PACKAGES FASTER AND ALLOWS DAMP PACKAGES TO MAINTAIN SPEED***


***MULTIPLE TYPES OF UHMW MATERIALS ARE AVAILABLE TO SUPPORT SPECIFIC PACKAGE SIZES AND WEIGHTS***

***UHMW FDA APPROVED MATERIAL IS AVAILABLE***

***ALLOWS SELF-STARTING AT ANGLES UP TO 10 DEGREES LESS THAN STANDARD STEEL CHUTES***

***FULLY CUSTOMIZABLE - SCALABLE, WITH FEW RESTRICTIONS ON WIDTH, SIDE GUARD HEIGHT OR PITCH***

***SST™ GRAVITY CHUTES CAN BE DELIVERED ASSEMBLED AND READY FOR INSTALLATION***

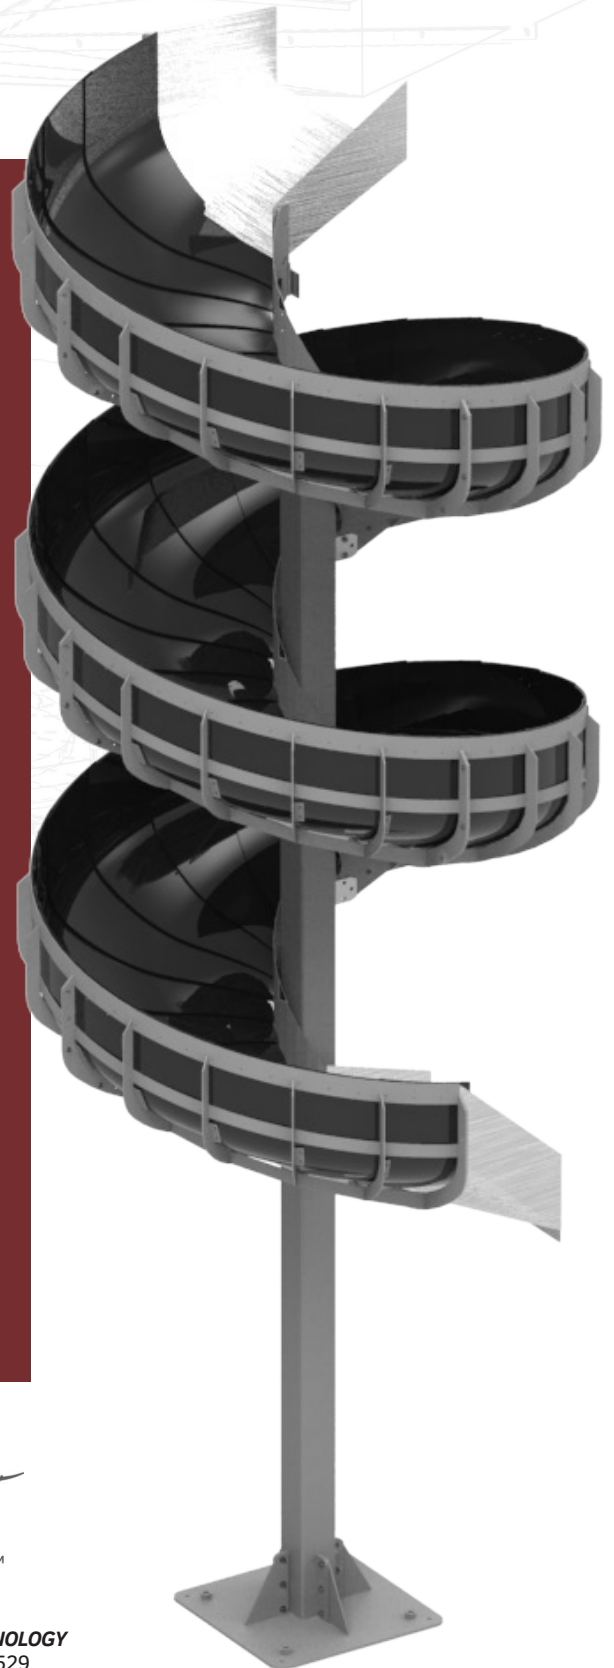


**Manufacturing Quality  
Metal Products  
Since 1903**



**SLICK SURFACE TECHNOLOGY**  
U.S. Patent #8733529

# ENTRY/EXIT CONFIGURATIONS

## RIGHT DECLINE (CLOCKWISE)

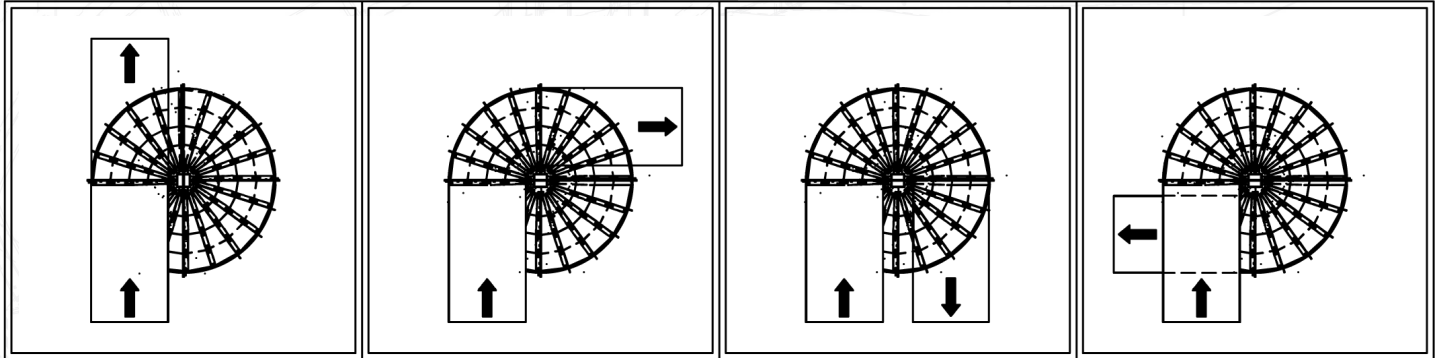


**C-1**

**C-2**

**C-3**

**C-4**

## LEFT DECLINE (COUNTER-CLOCKWISE)

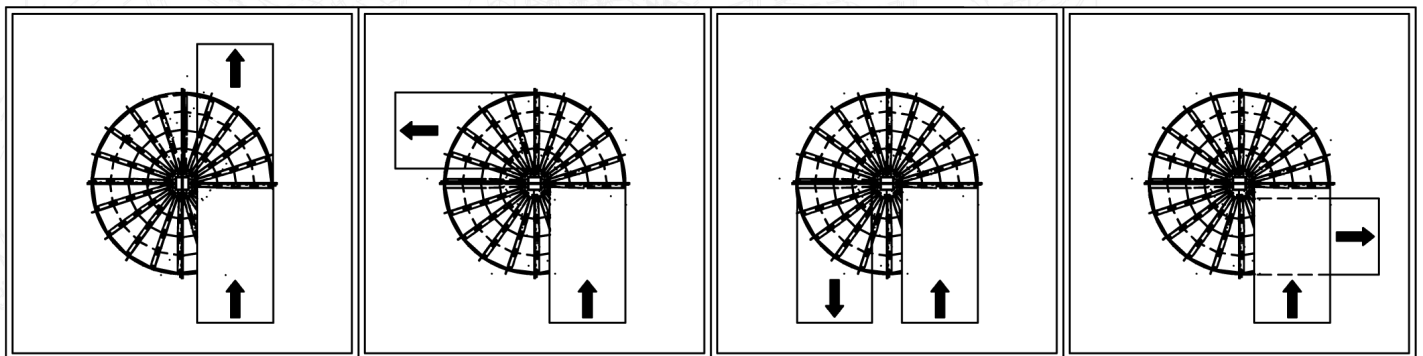

**CC-1**

**CC-2**

**CC-3**

**CC-4**



**TIFFIN METAL PRODUCTS COMPANY™**

450 Wall Street · Tiffin, Ohio 44883  
800-537-0983 · [www.tiffinmetal.com](http://www.tiffinmetal.com)

